



EASYCHEM 300

STATE-OF-THE-ART DIRECT READ
DISCRETE ANALYZER FOR
AUTOMATED CHEMISTRIES



EASYCHEM 300

FULLY AUTOMATED, DIRECT READ, DISCRETE ANALYZER TO MAXIMIZE PRODUCTIVITY FOR ROUTINE AND SPECIAL CHEMISTRIES, UP TO **300 TESTS/HOUR**



The Easychem 300 combines the latest technology in discrete analysis with an innovative, unique design that guarantees accurate and reproducible results.

The Easychem 300 is the first discrete analyzer to utilize the Cuvette Quality Assurance System, performing an integrated QC check of each cuvette prior to use. In addition to automated analysis the Easychem 300 offers automated system Quality Control.

The Easychem 300 is also the first discrete analyzer to utilize a patented, dedicated sample prep module for the determination of NO_x by Cadmium reduction. Designed for multi-tasking and high throughput rates, the NO_x module also provides automated cadmium regeneration.

Now, the instrument provides also a pH, Conductivity and Redox module.

INTERACTIVE GRAPHICAL "DASHBOARD" PROVIDES A USER-FRIENDLY INTERFACE:

1. SELECT METHOD(S) AND TYPE IN SAMPLE IDS
2. FOLLOW THE DASHBOARD AND PLACE THE SAMPLES, REAGENTS, AND STOCK STANDARD IN THE AUTOSAMPLER
3. START ANALYSIS WITH A SIMPLE CLICK, ALL ANALYTICAL PROCEDURES FROM WORKING STANDARD DILUTION TO SAMPLE ANALYSIS, CUVETTE WASHING AND SYSTEM QC, ARE FULLY AUTOMATED AND DO NOT NEED ANY OPERATOR ACTION

THE ADVANTAGES OF DIRECT READ DISCRETE ANALYSIS

- Each reaction takes place in its own optical cuvette
- True sample blanking performed directly in each cuvette
- No flow cells
- No baseline stabilization
- No manual manifold changeover
- No excessive reagent consumption
- Automatic reagent blanking to evaluate reagent quality
- Pre and Post dilution of samples and calibration standards
- Automatic spike preparation
- Automatic method changeover
- Analyze samples in "batch" mode or "random" mode

DIRECT READ : MORE SIMPLICITY & SECURITY

The Easychem 300 utilizes direct read photometry utilizing a true discrete, direct read measurement system and reusable, high purity synthetic optical cuvette system eliminating compromised sample measurement.

SMARTWASH : ELIMINATE CARRYOVER DURING SAMPLING

- Level sensor makes probe washing easy, with a standard 2mm immersion depth
- Probe cleaned after every liquid contact - prevents cross contamination and carryover
- Potential contaminants go the way they need to flow – out of the sample probe!
- Three stage process: clean the inside of the probe, clean the washing well, then clean the outside of the probe

SAMPLE LOADING

- 4 universal, separate racks for continuous loading of samples, calibrators and controls
- Up to 300 tests/hour including ISE

FILTER WHEEL

- 9 optical filters, plus 1 dark filter, ranging from 340nm to 880 nm
- Others filters optionally available

Micro pipettor-dilutor

Washing station Smartwash



Cadmium module for Nitrate analysis or



ISE module for pH, conductivity and redox analysis



On-board reagents (up to 72 reagents)



4 universal racks for cups and primary tubes



Long-life cuvettes with integrated Cuvette Quality Assurance System

CUVETTE QUALITY ASSURANCE SYSTEM : ELIMINATE CARRYOVER DURING ANALYSIS

- Automated cleaning eliminates carryover in the cuvette
- Optical integrity of each cuvette quantitatively verified before each use
- Provides an infinite number of reaction vessels for analysis
- Economical: long lasting cuvettes
- Environmentally friendly: Minimize hazardous waste and solid wastes
- No operator intervention required!

COMPUTER CONTROLLED MICRO PIPETTOR

- Accurate and precise dispensing of all liquids
- Automatic probe washing between each sampling cycle
- Microliter reagent and sample consumption
- Liquid level sensor provides warnings for low reagent and sample levels


NITRATE/NITRITE OR ISE MODULE

- Automated cadmium coil regeneration for Nitrate & Nitrite analysis, complies with US EPA Method # 353.2 and SM 4500-NO3-F
- ISE (Ion Selective Electrodes) module for pH, conductivity and redox analysis

PHOTOMETER

- High resolution, dual beam digital detector
- Expanded absorbance range to 4.200 ABS
- 5 detection modes: endpoint, fixed time, differential, bichromatic, and kinetic

USER FRIENDLY SMARTSTART SOFTWARE

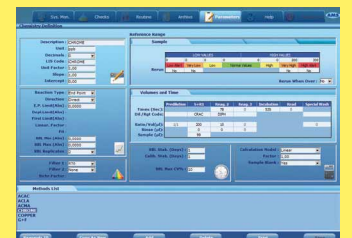

The Easychem 300 operating software runs under Windows XP or Windows Vista. Its bright graphical user interface simplifies routine work and offers the operator a concise guide through the operating functions.

MONITOR SCREEN

- Real-time presentation of sample and reagent status
- Dynamic monitoring of test execution
- Analyzer temperature control, START, STOP, and PAUSE functions

MAIN PARAMETERS

Surface, ground, drinking, waste and sea water

- Acidity
- Alkalinity*
- Aluminum
- Ammonia*
- Chemical Oxygen Demand (COD)*
- Chloride*
- Chlorine
- Chromium*
- Cyanide*
- Fluoride*
- Hardness*
- Iron
- Manganese
- Nitrate*
- Nitrite*
- Phenol*
- Phosphate*
- Phosphorous*
- Silicate*
- Sulfate*
- Total Kjeldahl Nitrogen*
- Total Kjeldahl
- Urea

** According to EPA, ISO approved Methods*

Wine

- Acetic acid
- Ammonia
- Ascorbic Acid
- Copper
- Ethanol (TVA)
- Free SO₂
- Fructose
- Gluconic acid
- Glucose
- Iron
- Malic acid
- OD 420, OD 520, OD 620
- PANOPA
- pH
- Sorbic Acid
- Sucrose
- Tartaric acid
- Total acidity
- Total SO₂

Soils & Plants

- Ammonia
- Boron
- Calcium
- Chloride
- Lysine
- Magnesium
- Nitrate
- Nitrite
- Phosphate
- Total Nitrogen
- Total Phosphorous
- Urea

Feeds & Fertilizers

- Ammonia
- Calcium
- Chloride
- Phosphate
- Protein
- Total Nitrogen
- Total Phosphorous
- Urea

METHODOLOGY PROGRAMMING

- All parameters are completely user programmable
- Up to 999 methods can be memorized
- All settings are user programmable
- User defined instrument factors
- User selectable pre-dilution and re-dilution ratio
- User selectable samples re-run option
- Tests calculation models are user selectable: Factor, Standard, Linear Fit, Point to Point, Quadratic, Cubic, Quartic, Cubic Inv., Sp-line, Log-Logic, Exponential, Log-Log Cubic

AUTOMATIC DETECTION OF:

- End point limit
- Substrate depletion
- Fixed time and kinetic reaction linearity

GRAPH SCREEN

- Display of test reaction curves
- Display of test calibration curves

DIAGNOSTIC SOFTWARE

- Each instrument part can be singularly tested
- Remote diagnostic capability

MORE FEATURES

- Multilanguage files (user programmable)
- Bi-directional communication compliant with LIMS standard
- Traceability and lot management

READY TO USE REAGENTS

- Developed specifically for the SMARTCHEM and EASYCHEM analyzers
- A full range of reagents for Environmental and Wine analysis
- Complete range adapted to all parameters
- Save time
- Save money
- Simple
- Ready to use



We have created Selection, a full range of enzymatic and colorimetric reagents dedicated to discrete analyzers Smartchem and Easychem. Developed, tested and validated by our application laboratory, they will guarantee a perfect stability and reproducibility of your analyses. Very easy to use, they are supplied liquid, in specific bottles directly positionable on Smartchem and Easychem, and automatically detected by the bar code reader (in

option). Thus, this ready solution greatly simplifies the preparation of your analysis, facilitates the use and storage of reagents. It also secures yours analyzes with reagents adapted to your application and your instrument.

REAGENTS FOR ENVIRONMENTAL ANALYSIS	REAGENTS FOR WINE ANALYSIS
Selection AQUA	Selection OENO
<p>Alkalinity Ammonia Chromium VI Chlorides Cyanides Nitrate Nitrite Phosphates Silicate Sulfates Phenol index Total Kjeldahl Nitrogen Total Phosphorous</p>	<p>Acetic, Citric, Gluconic, Lactic, Malic and Tartric Acid Alpha Amino Nitrogen Ammonia Anthocyanin Arginine Copper Fructose Free SO2 Glucose Glycerol Iron Polyphenols Total Acidity Total SO2 Urea</p>

Other parameters on demand.

Kits supplied in liquid format in vials adapted to your Smartchem or Easychem.

1 to 3 reagents necessary according the parameter.

THE AMS SYSTEMA DISCRETE ANALYZERS RANGE



Smartchem 140
Up to 140 tests/hour



Smartchem 170
Up to 170 tests/hour



Smartchem 200
Up to 200 tests/hour



Easychem 300
Up to 300 tests/hour

TECHNICAL SPECIFICATIONS

DESCRIPTION	Fully automated, direct read, bench top, Discrete analyzer		
ASSAY TYPE	End Point, Kinetic, Differential, Bi chromatic assays up to 999 tests, fully programmable		
ON-BOARD REAGENTS	Up to 72 reagents can be loaded into the refrigerated compartment and distributed on: - 4 removable racks with 16 positions each (25 ml containers) - 8 extra position for 25 ml containers 10/20 ml containers can be adapted		
SAMPLES LOADING	- 4 universal, separate racks for continuous loading of samples, calibrators and controls - Each rack contains up to 15 samples (2 ml or 4 ml cups and/or 10-15 ml tubes) - 8 extra positions for urgent samples, calibrators and controls - Tubes size: 10-15 mm diam. and 40-100 mm height		
URGENT SAMPLE ANALYSIS	Allowed at any time		
THROUGHPUT	Up to 300 tests/hour		
READING SYSTEM	Direct photometry		
MINIMUM REACTION VOLUME	200 µl		
OPTICS SYSTEM	Photometer	multi - wavelenght optics, double beam	
	Wavelength	9 narrow band interferential filters	
	Source	halogen lamp 6V/10W	
	Optical Path	6 mm	
	Linear range	0.001 - 4.200 Abs	
	Resolution	0.0001 Abs	
SAMPLING SYSTEM	One mechanic arm provides all sampling operation with : - Capacitive liquid level sensing - Reagent pre-warming at 37°C - Automatic probe washing - Sample Volume range : 2.0 µl- 50 µl (1 µl incr.) - Reagent Volume : 3.0 µl-330 µl (1 µl incr.) - Sample pre-dilution - Sample rerun with or without dilution		
DILUTOR	Automatic dilution in pre and post-dilution		
REACTION PLATE	Holds 80 cuvettes divided into 4 racks with 20 cuvettes each and performs the following operations: - Automatic cuvette washing - Continuous monitoring of cuvette quality - Incubation temperature: 37°C +/- 0,2		
DIMENSIONS	50 x 70 x 90 cm (H x W x L)		
WEIGHT	35 Kg		
OPTIONAL ACCESSORIES	- Bar code reader for Sample - Bar code reader for Reagent		- ISE detector - Nitrate module
COMPLEMENTARY PRODUCTS	Digestion system: Easy digest Distillation system: Easy Dist Ready to use reagents		
			

© June 2012, AMS SYSTEA Group. Non contractual pictures. Specifications may be changed without prior notice. All rights reserved.



www.ams-systea.com

Systea S.p.A.
Via Paduni, 2A
03012 Anagni
ITALY

Tel. : (+39) 0775 776 058
Fax. : (+39) 0775 772 204

AMS France
10 avenue Charles de Gaulle
95740 Frepillon
FRANCE

Tel. : (+33) 134 18 71 10
Fax : (+33) 139 60 72 39