

Coreless melt-blown filter bag

Eaton's MAX-LOAD coreless filter bags with melt-blown media offer solutions to a wide range of applications, such as water treatment, bulk and fine chemicals, metal cleaning and many more.

MAX-LOAD coreless filter bags are manufactured from melt-blown media. Combined in a multi-graded configuration they provide an excellent dirt holding capacity. The rigid structure with a total media depth greater than 18 mm, provides a barrier to hard and metallic as well as deformable gel-type contaminants.

Features and benefits

- Rigid graded media structure with a total depth greater than 18 mm
- Available in polypropylene and polyester with matching end caps and seal rings to cover most processing conditions
- Fits in all Eaton standard size 01 and 02 restrainer baskets
- Produced through silicon-free process and procedure¹
- Patented SENTINEL® seal ring provides bypass-free filtration

- Thermobonded endcaps provide a strong, bypass-free and a seamless construction
- Outer seamless spunbond cover structure limits fiber migration to a bare minimum
- Optionally available with additional polyamide 6.6 outer mesh cover in 10 µm for extra safety in highly intermittent operating conditions

Filter specifications

Materials

Polypropylene or polyester melt-blown media

Seal rings

SENTINEL ring with endcaps in polypropylene or polyester copolymer

Retention ratings

1, 5, 10, 20, 50,100 and 150 μm

Dimensions/Parameters

Sizes

01: Ø 180 x 345 mm L 02: Ø 180 x 730 mm L

Filter area

01: 0.15 m² 02: 0.30 m²

Max. operating temperature

Polypropylene: 90 °C Polyester: 135 °C

Max. differential pressure

2.5 bar

Recommended change-out pressure for disposal²

0.8 – 1.5 bar

Max. flow rates³

01: 12.5 m³/h 02: 25.0 m³/h

FDA/EC conformity

All polypropylene or polyester materials used in manufacturing comply with the regulations of the Food and Drug Administration (FDA), title 21 of the Code of Federal Regulations Section 177, and EC Regulations 1935/2004 and EC Directive 10/2011, as applicable for food and beverage contact.



MAX-LOAD Coreless Filter Bag Range



Endless fiber structure limits fiber migration at a bare minimum



Graded media structure yields gradual loading




Optional polyamide 6.6 mesh cover in 10 µm forms a protective outer shield



Bypass-free sealing through SENTINEL seal

Ordering information

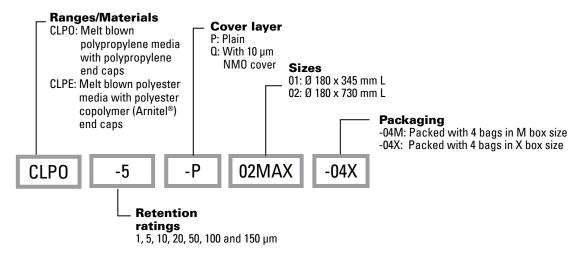

Based on an accepted paint compatibility test (see document QUC-STA-10).

North America 44 Apple Street Tinton Falls, NJ 07724 Toll Free: 800 656-3344 (North America only)

Tel: +1 732 212-4700

Europe/Africa/Middle East Auf der Heide 2

53947 Nettersheim, Germany Tel: +49 2486 809-0

Friedensstraße 41 68804 Altlußheim, Germany Tel: +49 6205 2094-0

An den Nahewiesen 24 55450 Langenlonsheim, Germany Tel: +49 6704 204-0

No. 3, Lane 280, Linhong Road Changning District, 200335 Shanghai, P.R. China Tel: +86 21 5200-0099

100G Pasir Panjang Road #07-08

Singapore 118523 Tel: +65 6825-1668

Rua Clark, 2061 - Macuco 13279-400 - Valinhos, Brazil Tel: +55 11 3616-8400

For more information, please email us at filtration@eaton.com or visit www.eaton.com/filtration

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or

EF-FTB-21 05-2018





² Depending on the respective application requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 20 °C.