

AGILITY & CAPABILITY

DRY RUNNING PISTON COMPRESSOR AND MODULAR COMPRESSOR STATION



AGILITY

DRY RUNNING PISTON COMPRESSOR

sera piston compressors from the AGILITY series were specially developed for operation with hydrogen in order to store it at up to 300 bar in the long term and convert it back into energy depending on requirements and application. The AGILITY plays an important role in a wide range of applications for autonomous energy systems in residential areas, neighbourhoods and industrial energy solutions. This dry-running, two-stage piston compressor is air-cooled, extremely energy-efficient, very quiet, oil-free and has been specially developed for its intended use. The simple installation and user-friendly design make the AGILITY the ideal choice for energy systems and for use in the modular **sera** compressor station CAPABILITY.

APPLICATIONS




- Heat and Power Applications
- District and neighbourhood supply
- Industrial supply
- Heat and power applications
- Emergency power supply
- Laboratory and research
- Solutions for self-sufficient energy supply

TECHNICAL DATA

- Gas: H₂, dry, free of solids
- Inlet pressure: 25-35 bar(g)
- Outlet pressure: max. 300 bar(g)
- Ambient temperature: -15 °C to +40 °C
- Flow rate: $\geq 3.0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure and $\geq 2.0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure
- Air-cooled and oil-free
- Noise emission less than 52 dB(A)
- High energy efficiency



AGILITY DIMENSIONS

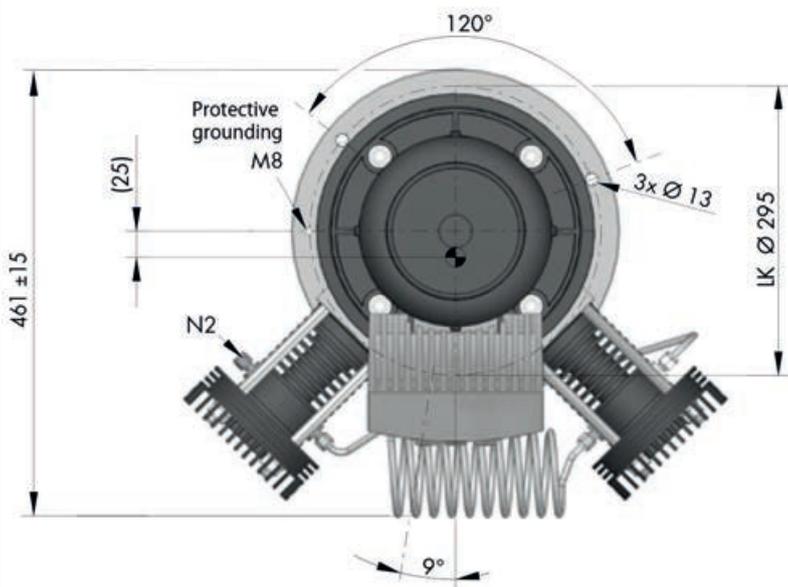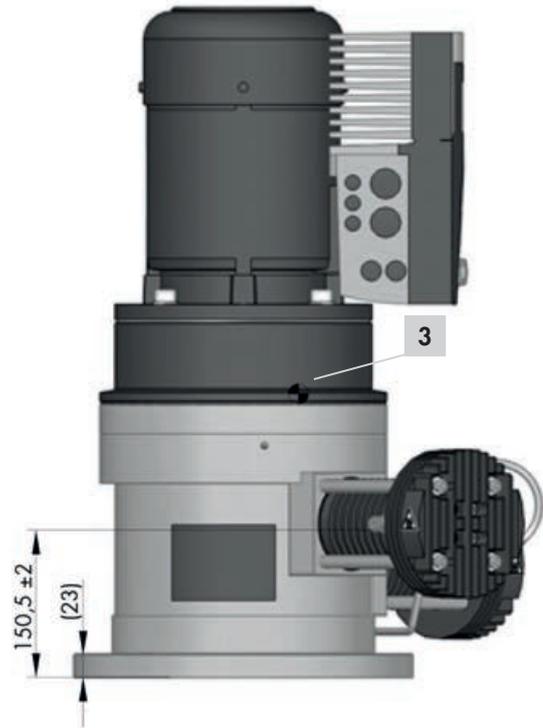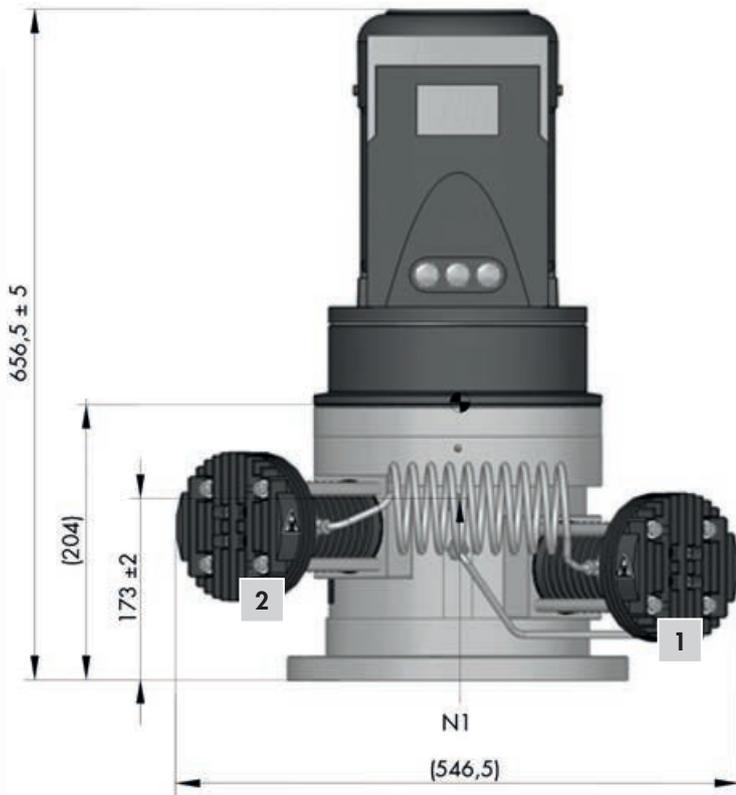

Connections

N1	Gas inlet Pipe fitting d=6 mm
N2	Gas outlet Pipe fitting d=6 mm


1	Stage 1
2	Stage 2
3	Centre of mass



AGILITY DRY RUNNING PISTON COMPRESSOR

HOME POWER APPLICATION

Renewable energy can be converted into hydrogen by electrolysis when surplus energy is available. After generation, the hydrogen is compressed with the **sera** AGILITY for long-term storage. If there is an energy demand that cannot be covered by the photovoltaic system or the battery storage system, for example, the previously generated, compressed and stored hydrogen is converted back into electricity or used to generate heat. Based on this concept, energy supply and heat supply can be realised autonomously.

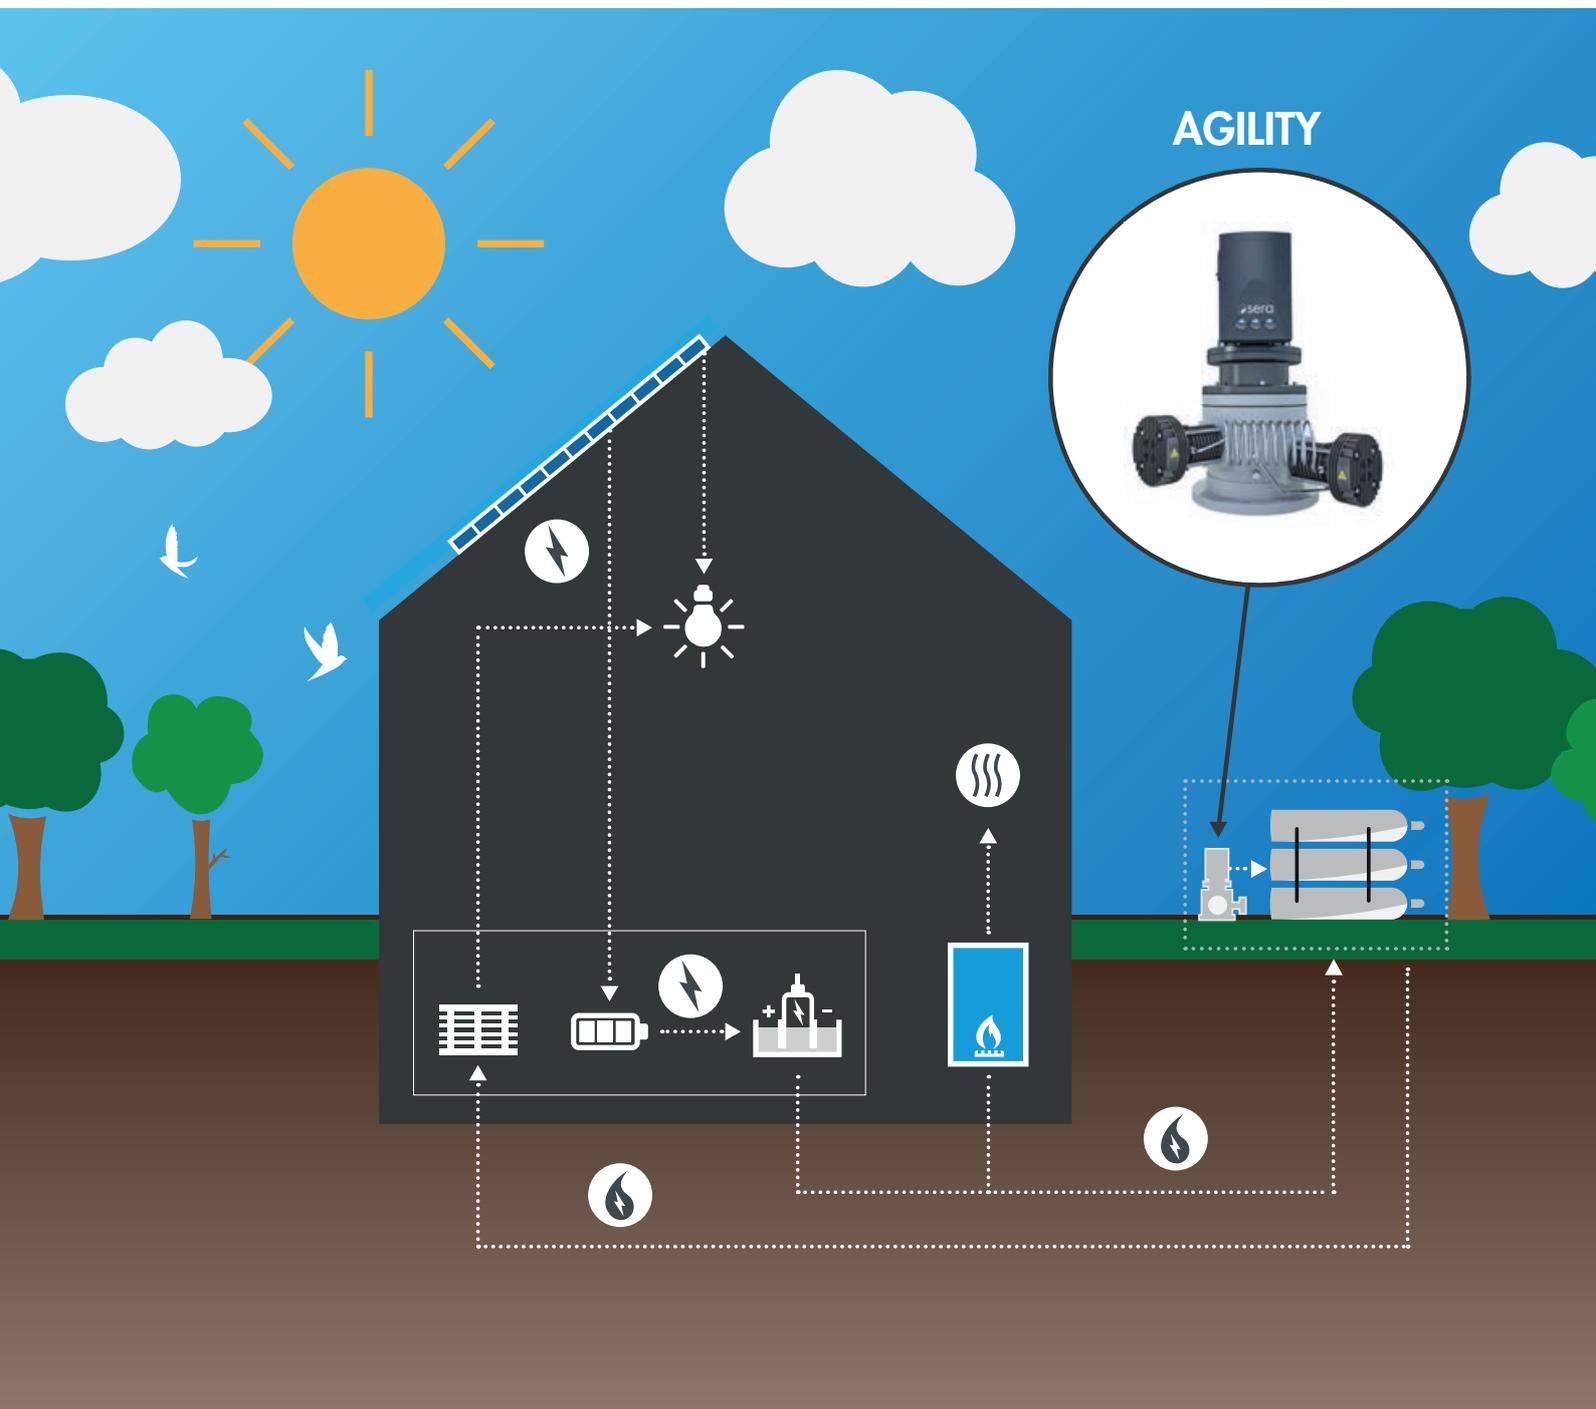


CAPABILITY COMPRESSOR STATION

Compressor stations in the CAPABILITY series are designed for storing hydrogen at pressures of up to 300 bar. The system can be supplied completely pre-configured and is therefore quickly ready for use. Wherever higher annual energy quantities are required for the independent and emission-free supply of neighbourhood and industrial solutions, the system can be used optimally with delivery rates of up to 12 Nm³/h at 150 bar or 9 Nm³/h at 300 bar. Thanks to its modular design, it can be easily adapted to new requirements at a later date. The **sera** CAPABILITY makes an important contribution to achieving the energy transition.

APPLICATION

The **sera** CAPABILITY is the link between the electrolyser and the fuel cell. Depending on requirements, it compresses hydrogen to up to 300 bar, which increases the energy density of the medium and requires less storage space while maintaining the same amount of energy.

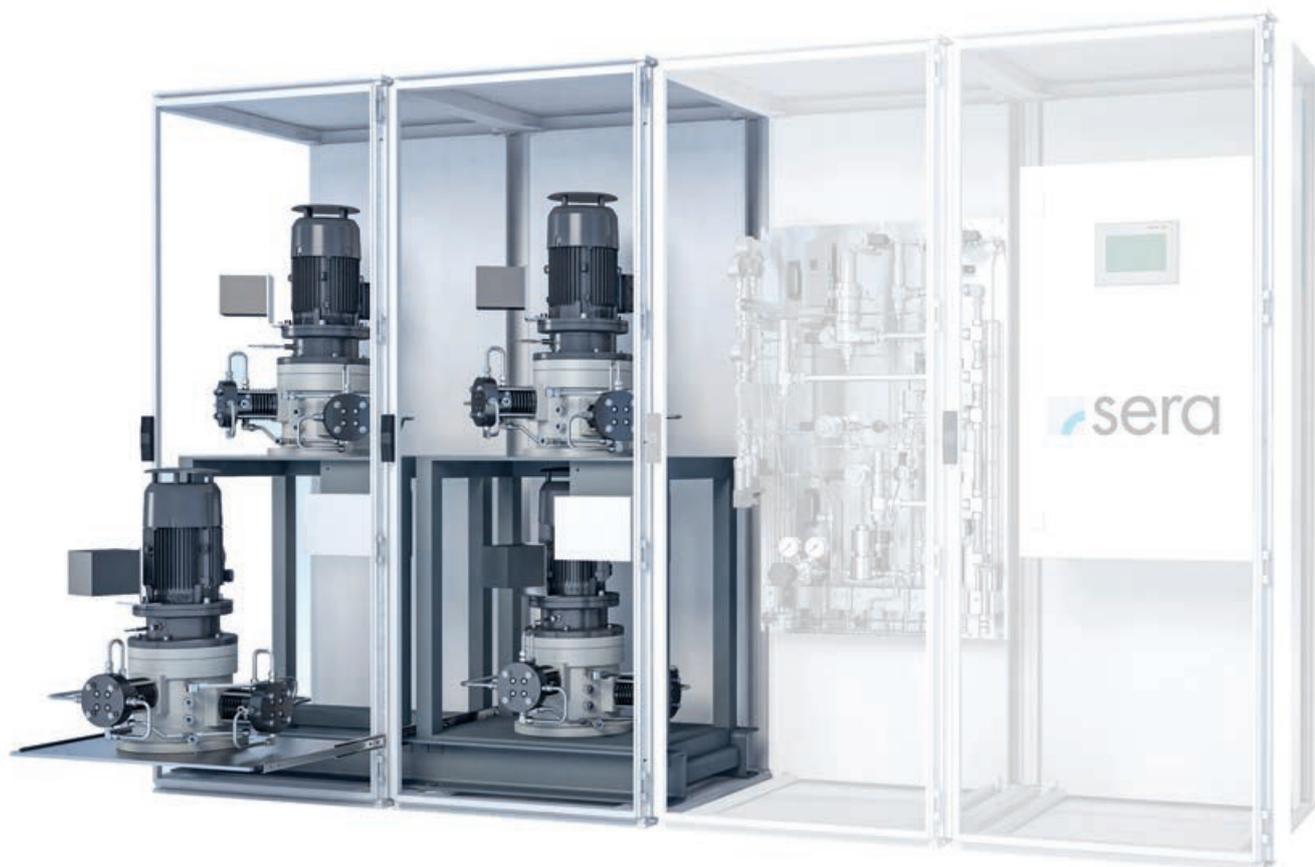


The core of the CAPABILITY consists of up to four AGILITY connected in parallel. Instrumentation and a corresponding controller are optional.

Note: a controller is essential if the instrumentation option is selected!

CAPABILITY COMPRESSOR STATION

The modular design of the CAPABILITY makes the compressor system flexibly expandable. With control and instrumentation, it is a fully integrated solution, ready for integration.

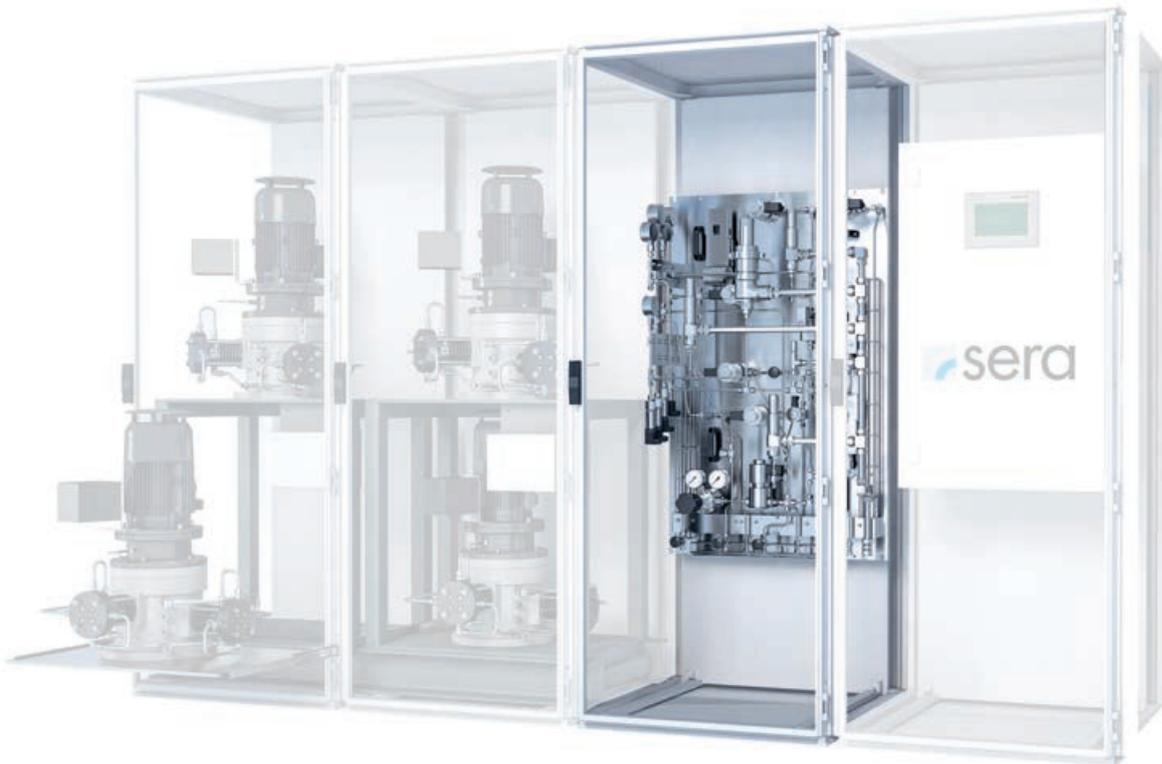

Instrumentation (option)



Control unit (option)

CAPABILITY 1.1 COMPRESSOR STATION

The CAPABILITY 1.1 compressor station includes an AGILITY series compressor with frequency converter, instrument panel and control cabinet with Profinet, integrated into a Rittal cabinet equipped with ventilation and SIL sensors.

The instrumentation includes flushing connections, overpressure protection and sensors for operating the compressor. The control system communicates with higher-level systems either via Profibus or Modbus. The gas connections are located on the left-hand side.

The CAPABILITY 1.1 compressor station is the entry-level solution for compressing and storing hydrogen.

It is the most compact in this series and, with one agility, is capable of compressing up to 2.5 Nm³/h of hydrogen at up to 300 bar.

It is characterised by its small footprint and modular design. This means that it can be optimally adapted to the respective upstream and downstream customer systems, which was a key basis for its development.

In addition, it can be individually selected whether it is used as a complete unit or as a built-in element in the customer system.

Where large quantities of hydrogen are to be stored in a short time CAPABILITY compressor stations 1.2 to 1.4 can be used, each with two to four AGILITY in a structurally similar and fully modular design.




CAPABILITY 1.1

- 1 Cabinet with ventilation and SIL sensors
- 2 Base frame for assembly on site
- 3 AGILITY with mounted frequency inverter
- 4 Instrumentation for AGILITY
- 5 Control system for AGILITY with fail-safe PLC

DIMENSIONS CAPABILITY 1.1



DIMENSIONS CAPABILITY 1.2 TO 1.4

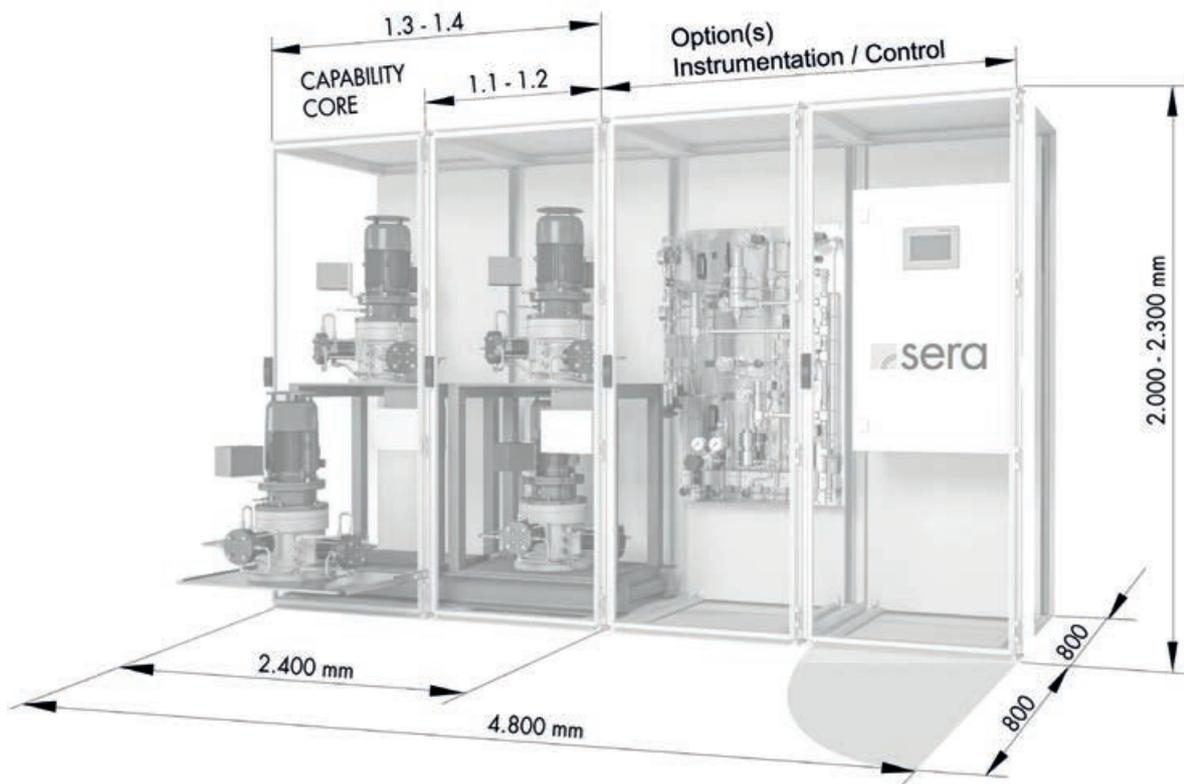

CAPABILITY SYSTEM AND COMPRESSOR DATA

SYSTEM DETAILS (The operating mode must be agreed with sera depending on the application)

Inlet pressure	25-35 bar(g)
Outlet pressur	300 bar(g)

Conveying capacity with test gas helium at 30 bar(g) inlet pressure

CAPABILITY 1.1	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.2	$\geq 4,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 6,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.3	$\geq 6,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 9,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
CAPABILITY 1.4	$\geq 8,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 12,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure

COMPRESSOR DATA AGILITY

Inlet pressure (PS)	Short-term min. 10 bar(g) operation 25 - 35 bar(g) housing pressure max. 40 bar(g)
Outlet pressur	max. 300 bar(g)
Delivery rate per AGILITY with test gas helium at 30 bar(g) inlet pressure	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
Protection class	IP 55
Noise emission	< 52 dB(A)
Corrosion protection	Coating C2 in accordance with DIN EN ISO 12944-2

ENVIRONMENTAL CONDITIONS

Max. Installation height	1,000 m above sea level, Higher installation with de-rating
Ambient temperature	-15 °C - +40 °C

CONVEYING MEDIUM


Gas type	Hydrogen 5.0, dry, free of solids (other qualities or gases on request)
Input temperature	max. 30°C
Dew point hydrogen	-50°C at 1 bar
Contamination from compressor	abrasion due to seals, initial lubricant

CAPABILITY SYSTEM AND COMPRESSOR DATA


DRIVE/MOTOR	
Motor type of the individual compressors	Asynchronous motor, 4-pole
Speed	Ca. 540 rpm (18Hz) and 750 rpm (25Hz)
Electrical voltage	220 VAC (Y)
Drive power per compressor	2.200 W; 750 W (at 16Hz)
Continuous power consumption per compressor	Ca. 650 W

INTERFACES	
Electrical (with control unit option)	Potential-free contacts
Communication (with control unit option)	PROFINET
Gas inlet	1/2"
Gas outlet	1/2"
Purge connection	1/2"
Blow-off line	1/2"

The control and operating mode of the overall system or the CAPABILITY compressor station and/or the AGILITY piston compressor must be agreed with **sera** in advance depending on the use and application.

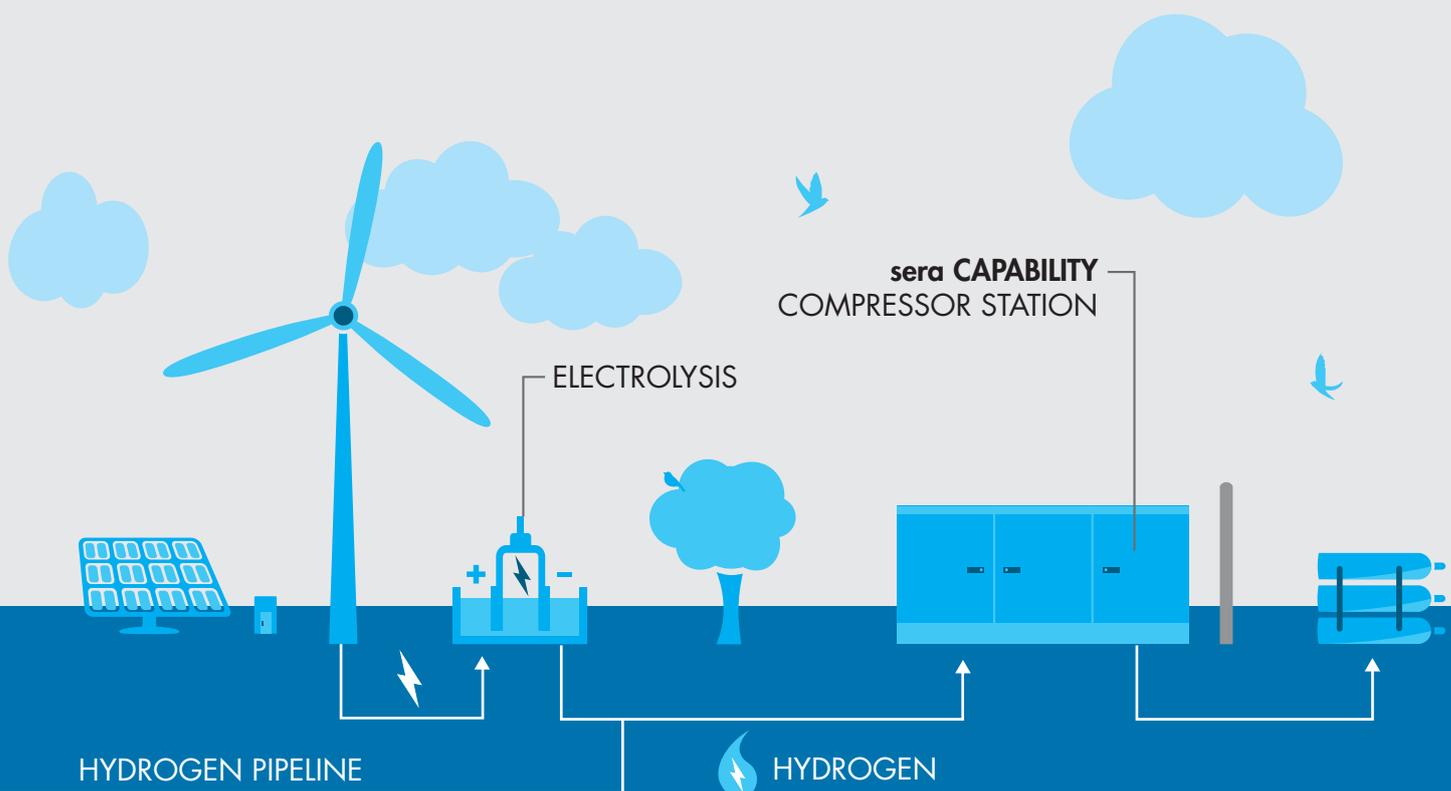



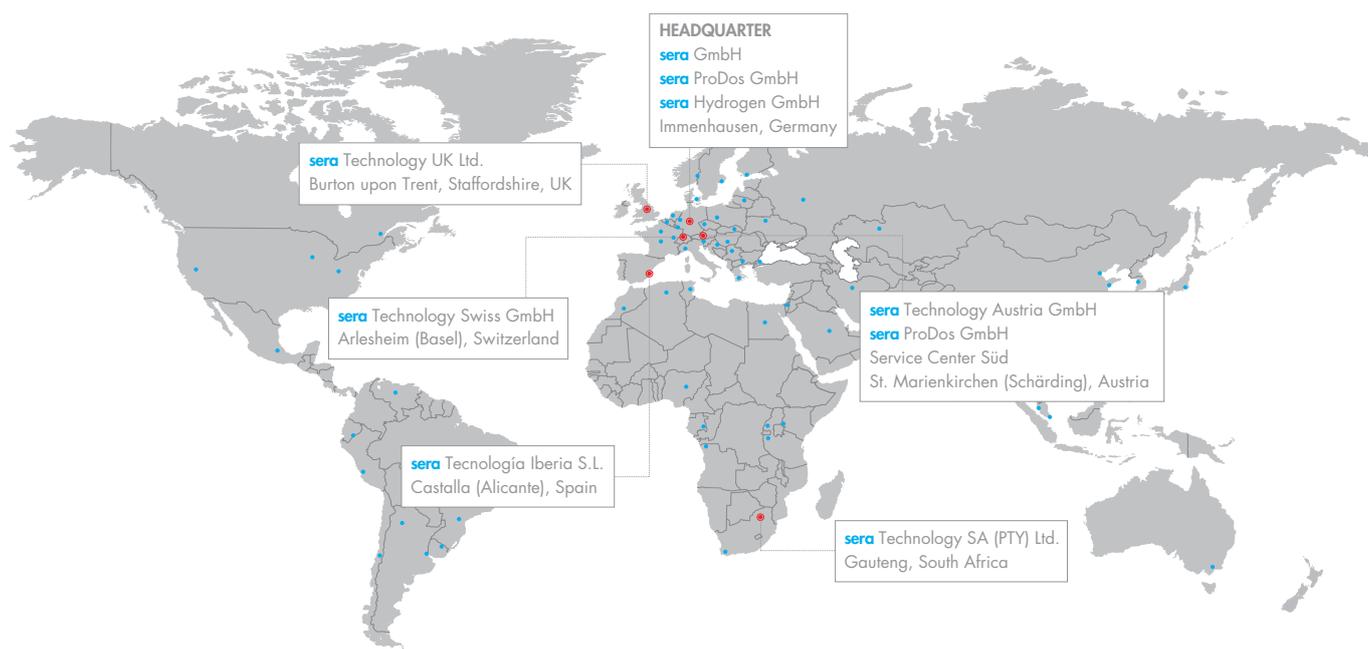

WORKING FOR YOU ALL OVER THE WORLD

sera GmbH

sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

info@sera-web.com
 www.sera-web.com

sera ProDos GmbH

sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

sales.prodos@sera-web.com
 www.sera-web.com

sera Hydrogen GmbH

sera-Straße 1
 34376 Immenhausen
 Germany

Tel.: +49 5673 999-04
 Fax: +49 5673 999-05

sales.hydrogen@sera-web.com
 www.sera-web.com

sera ProDos GmbH Service Center Süd

Gewerbestraße 5
 4774 St. Marienkirchen (Schärding)
 Austria

Tel.: +49 5673 999-02
 Fax: +49 5673 999-03

sales.prodos@sera-web.com
 www.sera-web.com

sera Technology Austria GmbH

Gewerbestraße 5
 4774 St. Marienkirchen (Schärding)
 Austria

Tel.: +43 7711 31777-0
 Fax: +43 7711 31777-20

sales.at@sera-web.com
 www.sera-web.com

sera Technology Swiss GmbH

Altenmatteweg 5
 4144 Arlesheim
 Switzerland

Tel.: +41 61 51142-60
 Fax: +41 61 51142-61

sales.ch@sera-web.com
 www.sera-web.com

sera Technology UK Ltd.

Unit 5, Granary Wharf Business Park
 Wetmore Road, Burton upon Trent
 Staffordshire DE14 1DU
 United Kingdom

Tel.: +44 1283 753400
 Fax: +44 1283 753401

sales.uk@sera-web.com
 www.sera-web.com

sera Technology SA (PTY) Ltd.

Unit 3-4, Airborne Park
 Cnr Empire & Taljaard Str Bartletts
 Boksburg, 1459 Gauteng
 South Africa

Tel.: +27 11 397 5120
 Fax: +27 11 397 5502

sales.za@sera-web.com
 www.sera-web.com

sera Tecnologia Iberia S.L.

Calle Cocentaina n°8,
 03420 Castalla
 (Alicante)
 Spain

Tel: +34 666024 388

sales.es@sera-web.com
 www.sera-web.com

www.sera-web.com

