

# TAF Series

Innovative self-cleaning high quality plastic filter for a wide variety of applications



flow rates

**up to 50 m<sup>3</sup>/h  
(220 US gpm)**

filtration degrees

**500-10 micron**

water for cleaning

**less than 1% of the total flow**

minimum operating pressure

**1.5 bar (22 psi)**


## features:

- Unique electric drive mechanisms
- Automatic flushing according to differential pressure and/or time
- Option for continuous flushing
- Low power consumption
- No interruption of downstream flow during flushing
- Electronically monitored cleaning with flexible control options
- Applications: Water supply systems, cooling water, wastewater treatment

## How the TAF Filters Work

### General

Amiad's TAF Series consists of easy-to-operate 2" and 3" automatic filters constructed of high quality plastic and driven by either an electrical or electronic self-cleaning mechanism. The various types of TAF screens are designed to cover a filtration degree range of 500-10 micron and flow rates up to 50 m<sup>3</sup>/h (220 US gpm).

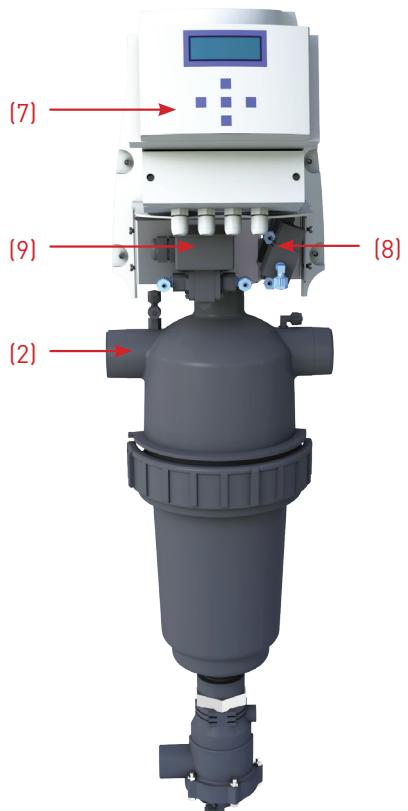

### The Filtering Process

The water enters the inner area of the screen cylinder (1) through the filter inlet (2) and flows through the screen to the filter outlet (3). The dirt particles are trapped on the inner screen surface and form a "filtration cake" that causes a differential pressure across the screen.

### The Self-Cleaning Process

During the self-cleaning process, while filtered water continues to flow, the filter's Exhaust Valve (4) is opened and the Drive Unit (5) spirals the Suction Scanner (6) back and forth. The spiral rotation of the suction scanner nozzles across the inner surface of the screen "vacuums" the filtration cake out the exhaust valve.

### The Control System

The control system consists of an Amiad Electronic Flushing Controller (7), a 3-way Solenoid Valve (8) that controls the filter's exhaust valve and a Pressure Differential Switch (9) that senses the pressure differential across the screen and sends a signal to the controller when it reaches a pre-set value (usually 0.5 bar/7 psi).


The controller begins a self-cleaning cycle under any of the following conditions:

1. Receiving a signal from the Pressure Differential Switch
2. Time interval parameter set at the controller by the user
3. Manual Start function at the controller keyboard


### "TAF" Models

Amiad's "TAF" product-line consists of electric filters with 220/110 VAC drive unit:


- 2" TAF 500 for flow rates of up to 25 m<sup>3</sup>/h (110 US gpm)
- 2" TAF 750 for flow rates of up to 25 m<sup>3</sup>/h (110 US gpm) and higher dirt loads
- 3" TAF 750 for flow rates of up to 50 m<sup>3</sup>/h (220 US gpm)

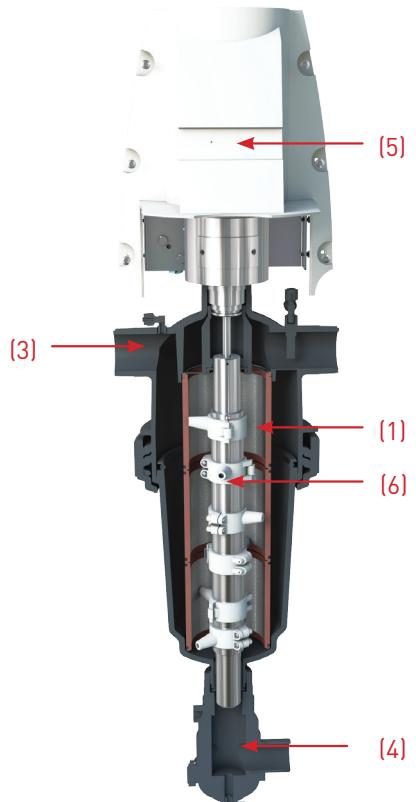



## 2" TAF-500

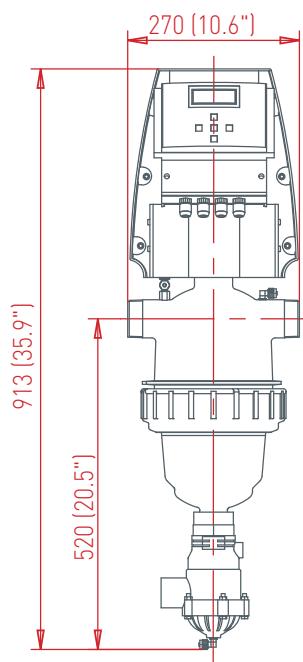

## Pressure Loss Graphs

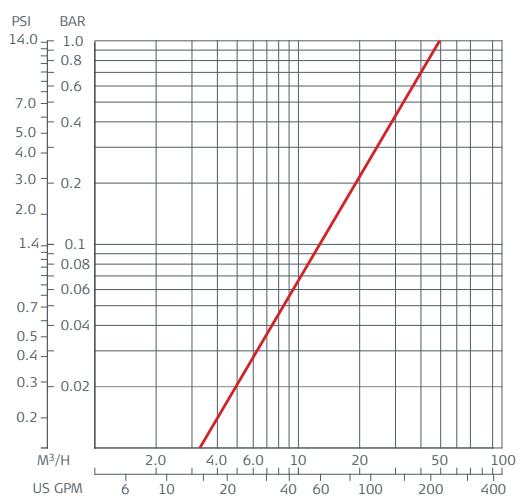


## 2" TAF-750

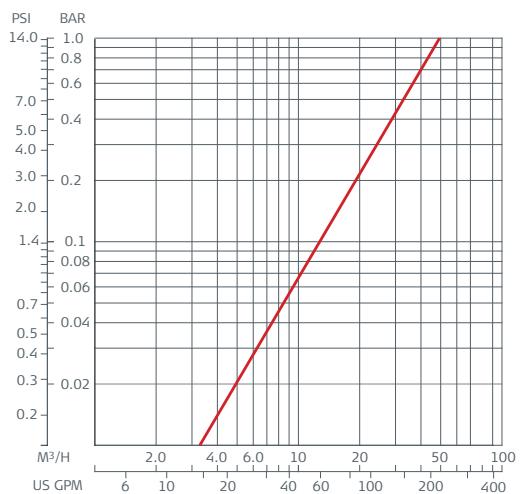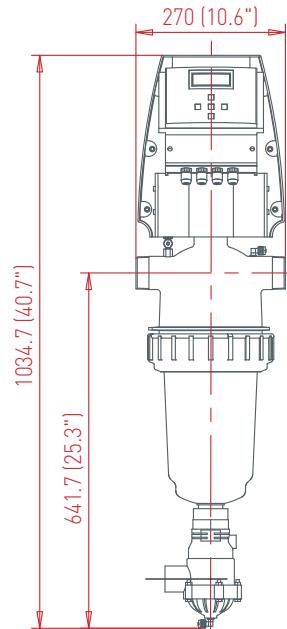


Dim. in mm (inch)

\*Approx. length required for maintenance



## 3" TAF-750

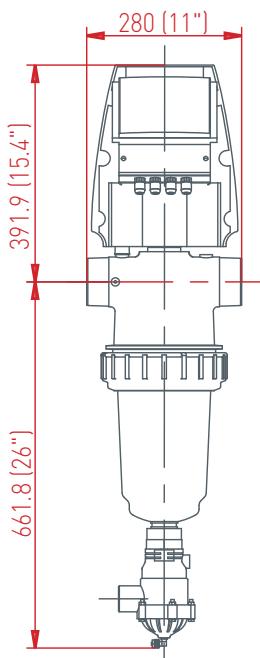

## Pressure Loss Graphs

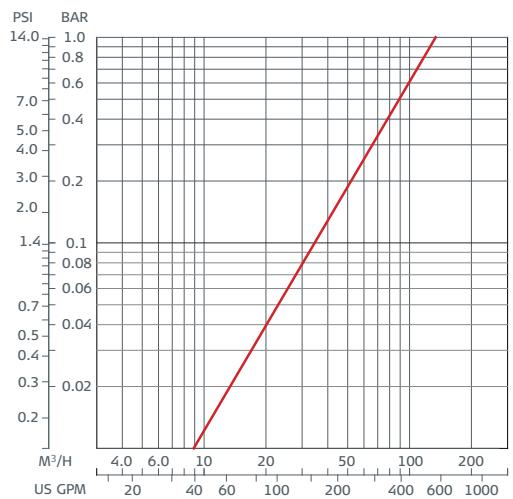

## 3" TAF-750, Flanges

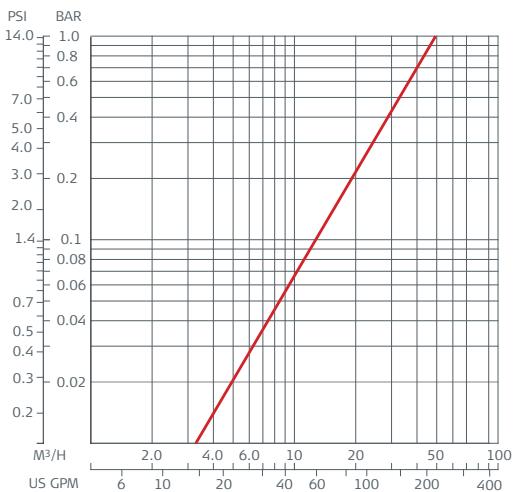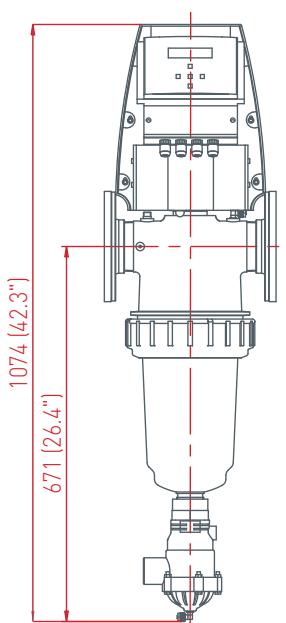

Dim. in mm (inch)

\*Approx. length required for maintenance

## Technical Specifications

Filter Type	2" TAF 500	2" TAF 750	3" TAF 750
<b>General Data</b>			
Maximum flow rate*	25 m <sup>3</sup> /h (110 US gpm)	25 m <sup>3</sup> /h (110 US gpm)	45 m <sup>3</sup> /h (198 US gpm)
Inlet/Outlet diameter	2"/50 mm	2"/50 mm	3"/80 mm or 3" Flanged
Standard filtration degrees	500, 300, 200, 130, 100, 80, 50, 25, 10 micron		
Min. working pressure	1.5 bar (22 psi) Can be lower if pressure is increased for flushing		
Max. working pressure	8 bar (116 psi)		
Max. working temperature	60°C (140 °F)		
Electrical Supply	110/220 VAC		
Weight [empty]	11.6 kg (25.6 lb)	12.4 kg (27.3 lb)	13.0 kg (28.7 lb)

\* Consult Amiad for optimum flow depending on filtration degree & water quality.

Flushing Data	2" TAF 500	2" TAF 750	3" TAF 750
Minimum flow for flushing (at 1.5 bar - 22 psi)	4 m <sup>3</sup> /h (18 US gpm)	5.7 m <sup>3</sup> /h (25 US gpm)	5.7 m <sup>3</sup> /h (25 US gpm)
Reject water volume per flush cycle	18 liter (4.7 US gallon)	25 liter (6.6 US gallon)	25 liter (6.6 US gallon)
Flushing cycle time	16 seconds		
Exhaust valve	40 mm (1½")		
Flushing criteria	Differential pressure of 0.5 bar (7psi), time intervals and manual operation		

Screen Data	2" TAF 500	2" TAF 750	3" TAF 750
Filter area	500 cm <sup>2</sup> (77.5 in <sup>2</sup> )	750 cm <sup>2</sup> (116 in <sup>2</sup> )	750 cm <sup>2</sup> (116 in <sup>2</sup> )
Screen types	St. St. 316 weave wire screen with Polycarbonate construction, SMO-254		

Control and Electricity	2" TAF 500	2" TAF 750	3" TAF 750
Rated operation voltage	220 V, 110 V upon request		
Electric motor	15 Watt 50 / 60 Hz, Gear output 48 / 58 R.P.M.		
Current consumption	0.18 A		
Control voltage	Electric TAF - 24 VAC		

Construction Materials	2" TAF 500	2" TAF 750	3" TAF 750
Filter housing and lid	PA+GF		
Cleaning mechanism	PVC, Delarin		
Exhaust valve	Plastic, Natural rubber		
Seals	NBR		
Control	Brass, Stainless steel, PE, PP		



Municipal



Industry



Irrigation

# HyXo Oy

P.O. Box 16 (Palokorvenkatu 2)  
FI-04261 Kerava, Finland  
Tel. +358 10 417 4500  
Fax +358 10 417 4501  
hyxo@hyxo.fi • www.hyxo.com

#### **Headquarters**

Amiad Water Systems Ltd. D.N. Galil Elyon 1, 12335, Israel,  
Tel: 972 4 690 9500, Fax: 972 4 690 9391,  
E-mail: info@amiad.com

#### **North America**

Amiad Filtration Systems, 2220 Celsius Avenue, Oxnard,  
California 93030, USA, Tel: 1 805 988 3323, Fax: 1 805 988 3313,  
E-mail: info@amiadusa.com

#### **South America**

Amiad Oil & Gas, Benito Nardone 2219, Montevideo, Uruguay,  
Tel: 598 2 7117617, Fax: 598 2 7120816,  
E-mail: amisur@adinet.com.uy

#### **Chile**

Amiad Andina, Carretera General San Martín 16.500 No 30,  
Loteo Industrial Los Libertadores, Colina, Santiago de Chile,  
Tel: 56 2 489 5100, Fax: 56 2 489 5101,  
E-mail: amiadandina@amiad.com

#### **Brazil**

E-mail: amiad@amiad.com.br

#### **Europe**

Amiad Water Systems Europe SAS, Ilot No4 ZI La Boitardière,  
37530 Chargé, Tel: 33 (0) 2 47 23 01 10, Fax: 33 (0) 2 47 23 80 67,  
E-mail: info@amiadfrance.com

#### **Germany**

Amiad Filtration Solutions (2004) Ltd. Zweigniederlassung  
Deutschland Prinz-Regent-Str. 68 a 44795 Bochum,  
Tel: 49 (0) 234 588082-0, Fax: 49 (0) 234 588082-12,  
E-mail: info@amiad.de

#### **Turkey**

FTS – Filtration & Treatment Systems, İstanbul yolu 26 Km,  
Yurt Orta Sanayii, Saray, Ankara, Tel: 90 312 8155266/7,  
Fax: 90 312 8155248, E-mail: info@fts-filtration.com

#### **India**

Amiad Filtration India Pvt Limited, 305 Sai Commercial Building  
Govandi St Rd, Govandi Mumbai 400 088, Tel: 91 22-67997813/14,  
Fax: 91 22-67997814, Email: info@amiadindia.com

#### **China**

Yixing Taixing Environtec Co., Ltd. 70 Baihe Chang, Xingjie Yixing  
Jiangsu, 214204, Tel: 86 510 87134000, Fax: 86 510 87134999,  
E-mail: marketing@taixing.cc

#### **South-East Asia**

Filtration & Control Systems Pte. Ltd., 19B Teo Hong Road,  
088330 Singapore, Tel: 65 6 337 6698, Fax: 65 6 337 8180,  
E-mail: fcs1071@pacific.net.sg

#### **Australia**

Amiad Australia Pty Ltd. 138 Northcorp Boulevard,  
Broadmeadows, Victoria 3047,  
Tel: 61 3 93585800, Fax: 61 3 93585888,  
E-mail: sales@amiad.com.au